


## Ondersteunde as / Supported shaft / Unterstützte Wellen

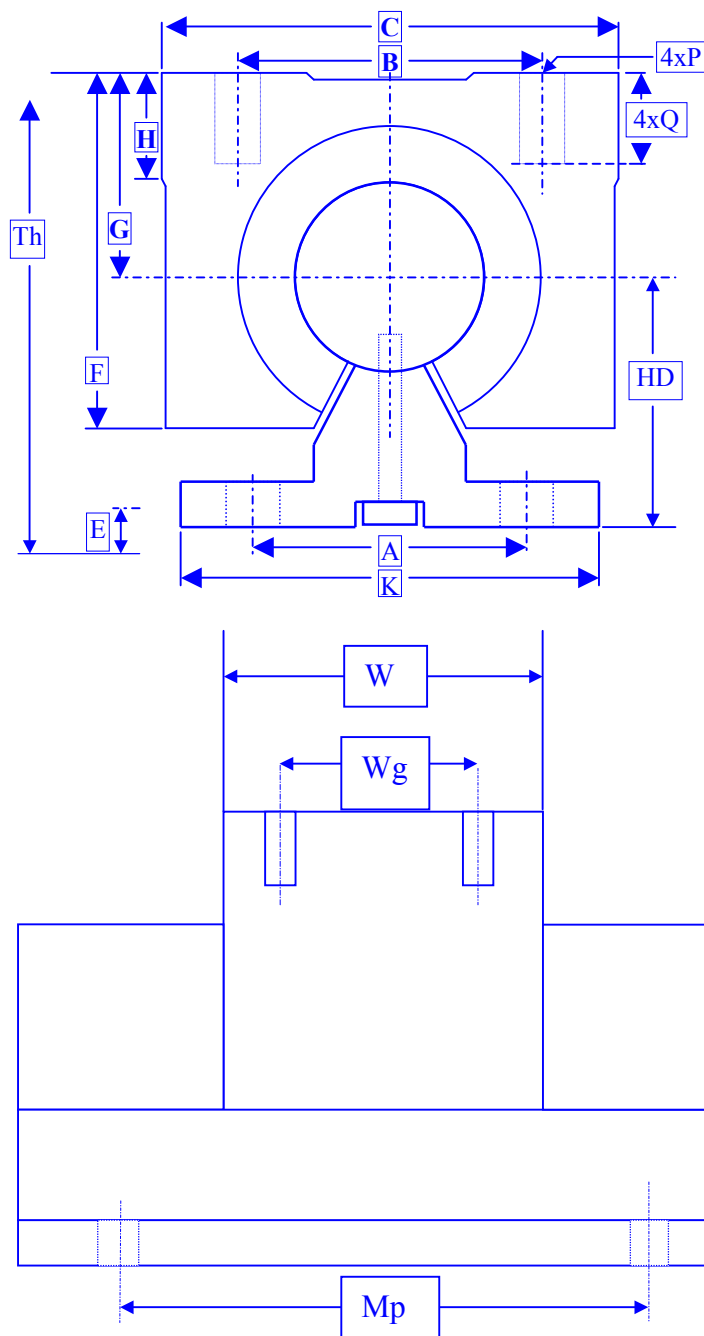

Model	Ø d	HD	Mp	C	G	W	F	Wg	Th	E	K	A	Ø A	B	Q	Ø P	C	Co
																	(N)	(N)
OAS-10	10			36	15	32	24	20						25	10	M5	380	560
OAS-12	12			40	17	39	27.6	26						28	10	M5	420	610
OAS-16	16	25	150	45	20	45	33	30	45	5	40	30	5.5	32	12	M5	770	1170
OAS-20	20	27	150	48	23	50	39	35	50	5	45	30	5.5	35	12	M6	860	1370
OAS-25	25	33	200	60	27	65	47	40	60	6	55	35	6.6	40	12	M6	980	1560
OAS-30	30	37	200	70	33	70	56	50	70	7	60	40	6.6	50	18	M8	1560	2740
OAS-35	35	43	200	80	37	80	63	55	80	8	65	45	9	55	18	M8	1660	3130
OAS-40	40	48	200	90	42	90	72	65	90	9	75	55	9	65	20	M10	2150	4010
OAS-50	50	62	200	120	53	110	91	80	115	11	95	70	11	94	20	M10	3820	7930